THE PERFECT COMPLEMENT

The extensive range of LISTA cabinets enables you to customise and add to your workspace and storage equipment. The high-quality steel cabinets can be easily integrated into a variety of working environments and individually adapted to your specific requirements. They are suitable both for industrial purposes and for storing files and similar items in offices and administrative departments. And of course your personal belongings are always kept safe in a LISTA cabinet.





The right solution for every need



Hinged door cabinets see p. 170



Sliding-door cabinets see p. 178



Wall-mounted cabinets with hinged or sliding doors see p. 184



Wall-mounted cabinets with roller shutter
see p. 186



Roller shutter cabinets see p. 188



Vertical pull-out cabinets see p. 190



Heavy-duty cabinets see p. 192



Clothing lockers see p. 196



Compartment cabinets



Battery charging cabinets see p. 204



Laptop cabinets and battery charging cabinets for electric scooters



Battery charging cabinets as an e-bike charging station see p. 214



Environmental and oil cabinets


see p. 216



Containers and large-scale pin cabinets*




Firefighter lockers*




Office cabinets*

Cabinet systems I Hinged door cabinets

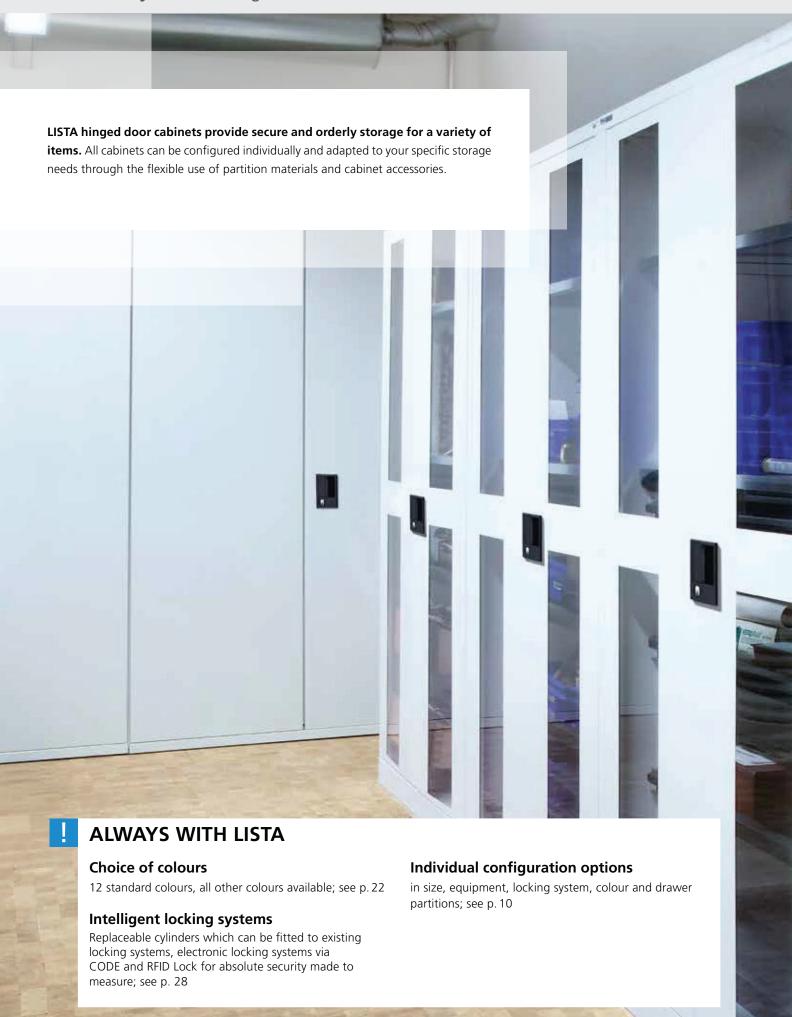



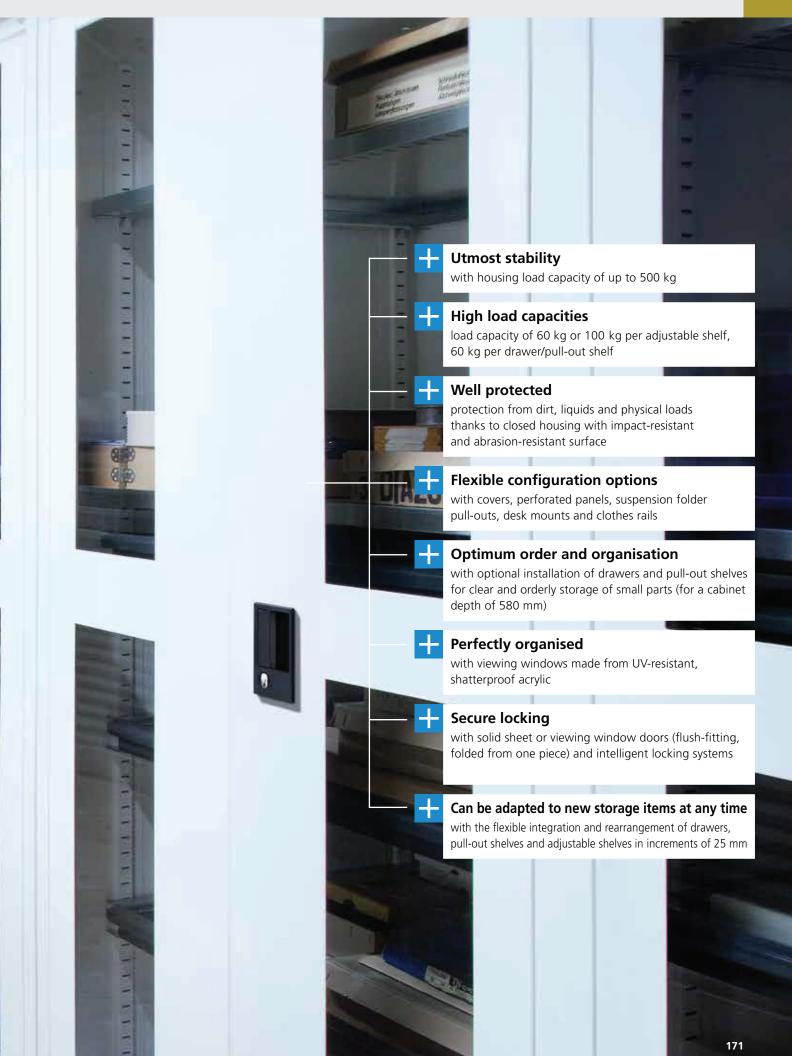

Cabinet systems I Hinged door cabinets

Hinged door cabinets

Depending on the model, the cabinets on these two pages are equipped with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg. Pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 60 kg. Note: Cabinets with drawers and pull-out shelves come with floor anchoring as anti-tilting device.





Art. no. **62.203.030.C** Reseda green, RAL 6011














W <mark>→</mark>	D 7	Adjustable shelves	Drawers	Pull-out shelves	€ kg	Hinge pins mounted	a	Art. no. 🞇	
Cabinets with 1 solid sheet door									
500	400	1	-	-	60	Hinge	KEY Lock	62.150.XXX	
500	500	1	-	-	60	Hinge	KEY Lock	62.151.XXX	
500	580*	1	-	-	60	Hinge	KEY Lock	58.280.XXX	
500	400	2	-	-	60	Hinge	KEY Lock	62.152.XXX	
500	500	2	-	-	60	Hinge	KEY Lock	62.153.XXX	
500	580*	2	-	-	60	Hinge	KEY Lock	58.283.XXX	
500	580*	2	1×95	-	50/60	Hinge	KEY Lock	58.652.XXX	



1000	400	2	-	-	60	Hinge	KEY Lock	60.460.XXX	
1000	500	2	-	-	60	Hinge	KEY Lock	60.461.XXX	
1000	580*	2	-	-	60	Hinge	KEY Lock	58.656.XXX	
1000	580*	2	1 × 95	_	50/60	Hingo	KEY Lock	58 658 XXX	



Hinged

- for the installation of drawers and pull-out shelves, doors must be fitted
- doors are flush with the cabinet housing
- opening angle approx. 115°



Perfect storage

All hinged door cabinet drawers can be fitted individually with LISTA partition material to ensure the correct storage of small parts within the drawers.

H 1950 mm



W→	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted	6	Art. no. 🞇	
Cabir	nets wit	h 2 solid s	heet doo	rs					
750	500	4	-	-	60	Hinge	KEY Lock	62.155.XXX	
750	580*	4	-	-	60	Hinge	KEY Lock	62.156.XXX	_

When ordering a cabinet from these two pages with CODE or RFID Lock, please add the suffix "C" or "F", respectively, to the article number stated in the table (e.g. 62.201.XXX.C).







LISTA





H 1950 mm





W→	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted	6	Art. no. 🞇	
Cabinets with 2 solid sheet doors									
1000	400	4	-	-	60	Hinge	KEY Lock	60.418.XXX	
1000	500	4	-	-	60	Hinge	KEY Lock	60.419.XXX	
1000	580*	4	-	-	60	Hinge	KEY Lock	58.617.XXX	
1250	400	4	-	-	60	Hinge	KEY Lock	60.420.XXX	
1250	500	4	-	-	60	Hinge	KEY Lock	60.421.XXX	
1250	580*	4	-	-	60	Hinge	KEY Lock	60.471.XXX	
1000	580*	2	3×95	2	50/60	Hinge	KEY Lock	58.665.XXX	
1000	580*	2	-	4	50/60	Hinge	KEY Lock	58.662.XXX	





Cabinets with 2 viewing window doors

400	4	-	-	60	Hinge	KEY Lock	62.201.XXX	
500	4	-	-	60	Hinge	KEY Lock	62.202.XXX	
580*	4	-	-	60	Hinge	KEY Lock	60.333.XXX	
400	4	-	-	60	Hinge	KEY Lock	60.583.XXX	
500	4	-	-	60	Hinge	KEY Lock	60.584.XXX	
580*	4	-	-	60	Hinge	KEY Lock	60.585.XXX	
580*	2	3×95	2	50/60	Hinge	KEY Lock	60.417.XXX	
580*	2	-	4	50/60	Hinge	KEY Lock	60.335.XXX	
	500 580* 400 500 580*	500 4 580* 4 400 4 500 4 580* 4 580* 2	500 4 - 580* 4 - 400 4 - 500 4 - 580* 4 - 580* 2 3×95	500 4	500 4 - - 60 580* 4 - - 60 400 4 - - 60 500 4 - - 60 580* 4 - - 60 580* 2 3×95 2 50/60 580* 2 - 4 50/60	500	500	500

^{*} Retrofitting with drawers and pull-out shelves possible.



Individual arrangements

- with adjustable shelves, drawers and pull-out shelves
- covers, perforated panels, suspension folder pull-outs, desk mounts and clothes rails are available as optional extras



Hinged doors with viewing windows

- for greater transparency of stored items
- encourages order

Cabinet systems I Hinged door cabinets







H 1950 mm, with partition



w→	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted		Art. no.	N.S	
Cabir	ets wit	h 2 solid s	heet doo	rs and pa	rtitior	ı				
1000	500	10	-	-	60	Hinge	KEY Lock	60.614.)	(XX	

KEY Lock 60.615.XXX 1000 580 Hinge 1000 580* 6 6×95 2 50/60 KEY Lock 58.445.XXX Hinge



Cabinets with 2 viewing window doors and partition

1000	500	10	-	-	60	Hinge	KEY Lock	60.621.XXX
1000	580*	10	-	-	60	Hinge	KEY Lock	60.622.XXX
1000	580*	6	6×95	2	50/60	Hingo	KEV Lock	60 602 XXX

^{*} Retrofitting with drawers and pull-out shelves possible.



Perfect storage

All hinged door cabinet drawers can be fitted individually with LISTA partition material to ensure the correct storage of small parts within the drawers.

H 1950 mm, with partition and clothes storage



W→ D 7 Clothes storage equipment

Hinge pins



Cabinets with 2 solid sheet doors, partition and clothes storage

1 adjustable shelf usable width 1000

982 mm, 3 adjustable shelves usable width 481 mm, 1 clothes rail 500 with 3 plastic hooks

Hinge

KEY Lock 60.472.XXX




Cabinets with 2 viewing window doors, partition and clothes storage

1 adjustable shelf usable width 982 mm, 3 adjustable shelves

1000 500 usable width 481 mm, 1 clothes rail with 3 plastic hooks

Hinge

KEY Lock 60.611.XXX















Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by 4 × 90°. 30 mm thick with load-bearing capacity of 60 or 100 kg.



Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.



Drawers and pull-out shelves

Full extension with ball bearings, including guide rails. Load capacity 60 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016. Only compatible with cabinets with hinges and a depth of 580 mm.



Robust steel tubing construction $40 \times 40 \, \text{mm}$, , closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

Please contact us for the complete range of accessories.

W For cabinet width mm			500	750	1000	1000	1250
						with central partition	
D 7 For cabinet depth	n mm	Load capacity kg	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
Adjustable shelf							
400		60	58.100.000	58.103.000	58.106.000	58.100.000	58.109.000
400		100	=	-	60.487.000	-	60.488.000
500		60	58.101.000	58.104.000	58.107.000	58.101.000	58.110.000
500		100	=	-	60.407.000	-	60.408.000
580		60	58.102.000	58.105.000	58.108.000	58.102.000	58.111.000
580		100	=	-	60.409.000	-	60.434.000
		Usable dimensions (W×D mm)	480×326/426/506	730×326/426/506	980×326/426/506	480×326/426/506	1230×326/426/506
Divider for adjustable	e shelf						
400	L	311×H 150 mm	58.144.000	58.144.000	58.144.000	58.144.000	58.144.000
500	L	411×H 150 mm	58.145.000	58.145.000	58.145.000	58.145.000	58.145.000
580	L	490×H 150 mm	58.146.000	58.146.000	58.146.000	58.146.000	58.146.000
Drawer	H	Usable height mm					
580	95	72	62.141.000	62.308.000	58.113.000	62.141.000	57.481.000
580	145	122	-	-	57.471.000	-	57.482.000
		Usable dimensions (W×D mm)	357×459	617×459	867×459	357×459	1117×459
Pull-out shelf	ΗΛ	Usable height mm					
580	53	43	62.142.000	-	58.115.000	62.142.000	-
		Usable dimensions (W×D mm)	357×459		867 × 459	357×459	
Base*	Н↑						
500	150		-	97.844.000	98.518.000	98.518.000	98.253.000
580	150		-	98.657.000	98.216.000	98.216.000	97.835.000
Base cover, , H 150 mr	m		-	57.238.000	97.986.000	97.986.000	62.806.000

Screw connections

Hinged door cabinets (for housing height 1000 mm) are designed to allow a second cabinet to be screwed on (one on top of the other).

98.501.000



Partition material sets for drawers





Slotted dividers and metal separators

	•				
For front height mm	Art. no.				
95	62.159.000				
1 slotted partition:	21 E on one side				
2 slotted dividers:	27 E				
3 metal separators:	7 E				



Slotted dividers and metal separators

For front height mm	Art. no.
95	62.160.000
1 slotted partition:	21 E on one side
3 slotted dividers:	27 E
3 metal separators:	5 E
1 metal separator:	6 E



Plastic boxes

For front height mm	Art. no.
95	62.161.000
3 plastic boxes:	150×150×71 mm
6 plastic boxes:	$150 \times 75 \times 71 \text{ mm}$
1 snacer angle	







Slotted dividers and metal separators

For front height mm	Art. no.				
95	58.477.000				
145	61.163.000				
1 slotted partition:	51 E on one side				
5 slotted dividers:	27 E				
6 metal separators:	$4 \times 8 E$, $1 \times 9 E$, $1 \times 10 E$				

Slotted dividers and metal separators

For front height mm	Art. no.	
95	58.478.000	
145	61.164.000	
1 slotted partition:	51 E on one side	
7 slotted dividers:	27 E	
8 metal separators:	7×6 E, 1×9 E	



. idstic boxes	
For front height mm	Art. no.
95	58.491.000
10 plastic boxes:	150×150×71 mm
13 plastic boxes:	$150 \times 75 \times 71 \text{ mm}$
1 spacer angle	









Slotted dividers and metal separators

Siotted dividers a	na metar separato
For front height mm	Art. no.
95	61.165.000
145	61.186.000
1 slotted partition:	65 E on one side
6 slotted dividers:	27 E
7 metal separators:	6×9 E, 1×10 E

Slotted dividers and metal separators

For front height mm	Art. no.	
95	61.166.000	
145	61.187.000	_
1 slotted partition: 8 slotted dividers: 9 metal separators:	65 E on one side 27 E 8×7 E, 1×9 E	




Suitable labels for partition material

The practical clip-on label holders are fitted directly onto the metal separators.



Labelling system see p. 268











Cabinet housing

The housings of the hinged door cabinets are made from high-quality sheet steel and are available with specifica-tions for one or two hinged doors, with or without a fixed partition. The inside fittings of the cabinet are easy to customize thanks to the 25:25 mm divisions.



Hinged doors

The hinged doors in solid sheet or with a viewing window are folded from one piece, flush-fitting and flush with the cabinet housing. The doors can be equipped with hinges, with an opening angle of approx. 115°. The hinged doors can be equipped with a KEY Lock, a CODE Lock or an RFID Lock as desired.

VVFOI	r cabinet width mm		500	750	1000	1000	1250
abinet hou	ısing					with central partition	
H 🛧	Clear height	D 7	Art. no. 🛚 🐫	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
1000	885	400	57.600.XXX	-	57.612.XXX	-	-
		500	57.601.XXX	-	57.613.XXX	-	-
		580	57.602.XXX	-	57.614.XXX	58.431.XXX	-
1950	1835	400	-	57.609.XXX	57.618.XXX	-	57.627.XXX
		500	-	57.693.XXX	57.619.XXX	-	57.628.XXX
		580	=	57.611.XXX	57.620.XXX	58.433.XXX	57.629.XXX
inged door	rs excl. clasp lock						
-	•						
Н	Door design		Art. no. 🥞	Art. no. 🞇	Art. no. 👋	Art. no. 🞇	Art. no. 🞇
Н	Door design Solid sheet		62.003.XXX	Art. no. 🖑	62.009.XXX	62.009.XXX	Art. no. 🞇
Η <mark>↑</mark>	Door design			Art. no. 🞇 - -			Art. no. 🞇 - -
H 1000	Door design Solid sheet		62.003.XXX	Art. no. *** 62.006.XXX	62.009.XXX	62.009.XXX	Art. no. %
H 1000	Door design Solid sheet Viewing window		62.003.XXX	- -	62.009.XXX 62.137.XXX	62.009.XXX 62.137.XXX	- 62.016.XXX
1000 1950	Door design Solid sheet Viewing window Solid sheet Viewing window		62.003.XXX	- -	62.009.XXX 62.137.XXX 62.011.XXX	62.009.XXX 62.137.XXX 62.011.XXX	- -
1000 1950 - clasp lock	Door design Solid sheet Viewing window Solid sheet Viewing window		62.003.XXX	- -	62.009.XXX 62.137.XXX 62.011.XXX	62.009.XXX 62.137.XXX 62.011.XXX	- 62.016.XXX
1000 1950 - clasp lock	Door design Solid sheet Viewing window Solid sheet Viewing window eparately lockable		62.003.XXX 62.307.XXX	- 62.006.XXX	62.009.XXX 62.137.XXX 62.011.XXX 62.012.XXX	62.009.XXX 62.137.XXX 62.011.XXX 62.012.XXX	62.016.XXX





Clasp locks

The standard KEY Lock locking system with replaceable cylinders makes it easy to adapt to existing locking systems. With CODE Lock, the key is replaced by a simple numeric combination. The LISTA RFID Lock enables automatic and contactless locking through radio frequency identification.



Cabinet systems | Sliding-door cabinets

178








Cabinet systems I Sliding-door cabinets with solid sheet doors







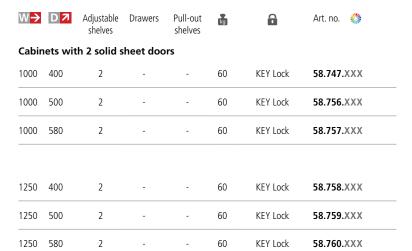



Art. no. 58.757.060 Black, NCS S 9000-N








Cabinets with 2 solid sheet doors and partition

1500	400	4	-	-	60	KEY Lock	58.761.XXX
1500	500	4	-	-	60	KEY Lock	58.762.XXX
1500	580*	4	-	-	60	KEY Lock	58.763.XXX
2000	400	4	-	-	60	KEY Lock	58.796.XXX





Sliding-door cabinets

Depending on the model, the cabinets on these two pages are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg, pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg







Art. no. **58.750.020** Light grey, RAL 7035











www.lista.com

W <mark>→</mark>	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	6	Art. no. 🛚 🐫
Cabir	nets wit	h 2 solid s	heet doo	rs			
1000	400	4	-	-	60	KEY Lock	58.748.XXX
1000	500	4	-	-	60	KEY Lock	58.749.XXX
1000	580	4	-	-	60	KEY Lock	58.750.XXX
1250	400	4	-	-	60	KEY Lock	58.777.XXX
1250	500	4	-	-	60	KEY Lock	58.778.XXX
1250	580	4	-	-	60	KEY Lock	58.779.XXX

Cabir	nets witl	n 2 solid s	heet doo	rs and p	partition		
1000	580*	8	-	-	60	KEY Lock	58.751.XXX
1500	400	8	-	-	60	KEY Lock	58.780.XXX
1500	500	8	-	-	60	KEY Lock	58.781.XXX
1500	580*	8	-	-	60	KEY Lock	58.782.XXX
2000	400	8	-	-	60	KEY Lock	58.783.XXX
2000	500	8	-	-	60	KEY Lock	58.784.XXX
2000	580*	8	-	-	60	KEY Lock	58.754.XXX
2000	580*	4	-	4	50/60	KEY Lock	58.755.XXX



Lock-down cylinder lock / **KEY Lock**

The doors cannot be prised out thanks to the right-angled bar used in the locking system.



Extremely smooth running The ball bearing rollers of the sliding doors run quietly on the guide rails.



Cabinet systems I Sliding-door cabinets with viewing window doors



H ↑ 1000 mm







2000

580*

Cabii		victing		400.50	a part		
1500	400	4	-	-	60	KEY Lock	60.715.XXX
1500	500	4	-	-	60	KEY Lock	60.716.XXX
1500	580*	4	-	-	60	KEY Lock	60.717.XXX
2000	400	4	-	-	60	KEY Lock	60.721.XXX
2000	500	4	-	-	60	KEY Lock	60.722.XXX
2000	580*	4	_	-	60	KEY Lock	60.723.XXX

50/60

KEY Lock

60.725.XXX

2×95



Sliding doors with viewing windows The LIV-resistant acrylic place is

The UV-resistant acrylic glass is shatterproof and enables clear organisation at the workstation.







D7	Adjustable shelves	Drawers	Pull-out shelves	kg	•	Art. no. 🞇
ets wit	h 2 viewir	ng windo	w doors	and part	tition	
400	8	-	-	60	KEY Lock	60.718.XXX
500	8	-	-	60	KEY Lock	60.719.XXX
580	8	-	-	60	KEY Lock	60.720.XXX
400	8	-	-	60	KEY Lock	60.726.XXX
500	8	=	-	60	KEY Lock	60.727.XXX
580*	8	-	-	60	KEY Lock	60.728.XXX
580*	4	-	4	50/60	KEY Lock	60.729.XXX
	400 500 580 400 500 580*	shelves nets with 2 viewin 400 8 500 8 580 8 400 8 500 8 580* 8	shelves shelves	shelves shelves nets with 2 viewing window doors 400 8 - - 500 8 - - 580 8 - - 400 8 - - 500 8 - - 580* 8 - -	shelves shelves nets with 2 viewing window doors and part 400 8 - - 60 500 8 - - 60 580 8 - - 60 400 8 - - 60 500 8 - - 60 580* 8 - - 60	shelves shelves nets with 2 viewing window doors and partition 400 8 - - 60 KEY Lock 500 8 - - 60 KEY Lock 580 8 - - 60 KEY Lock 400 8 - - 60 KEY Lock 500 8 - - 60 KEY Lock 580* 8 - - 60 KEY Lock



Sliding-door cabinets

Depending on the model, the cabinets on these two pages are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg, pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg





Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by $4\times90^\circ$. 30 mm thick with load-bearing capacity of 60 or $100\,\mathrm{kg}$.



Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.



Drawers and pull-out shelves

Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016. **For cabinet depth 580 mm.**



Base

Robust steel tubing construction 40 × 40 mm, closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

W -> For cabinet widt	th mm		1000	1000	1250	1500	2000
				with central partition		with central partition	with central partition
D 7 For cabinet depth mm	1	Load capacity kg	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
Adjustable shelf							
400		60	58.106.000	58.100.000	58.109.000	58.103.000	58.106.000
400		100	60.487.000	-	60.488.000	-	60.487.000
500		60	58.107.000	58.101.000	58.110.000	58.104.000	58.107.000
500		100	60.407.000	-	60.408.000	-	60.407.000
580		60	58.108.000	58.102.000	58.111.000	58.105.000	58.108.000
580		100	60.409.000	-	60.434.000	-	60.409.000
		Usable dimensions (W×D mm)	980×326/426/506	480×326/426/506	1230×326/426/506	730×326/426/506	980 × 326/426/506
Divider for adjustable she	elf						
400		L 311×H 150 mm	58.144.000	58.144.000	58.144.000	58.144.000	58.144.000
500		L 411×H 150 mm	58.145.000	58.145.000	58.145.000	58.145.000	58.145.000
580		L 490×H 150 mm	58.146.000	58.146.000	58.146.000	58.146.000	58.146.000
Drawer	Η <mark>↑</mark>	Usable height mm					
580	95	72	58.113.000	62.141.000	=	62.308.000	58.113.000
580	145	122	57.471.000	-	-	-	57.471.000
		Usable dimensions (W×D mm)	867×459	357×459		617×459	867×459
Pull-out shelf	Η <u></u>	Usable height mm					
580	53	43	58.115.000	62.142.000	-	-	58.115.000
		Usable dimensions (W×D mm)	867×459	357×459			867×459
Base	Η <mark>↑</mark>						
500	150		98.518.000	98.518.000	98.253.000	57.277.000	97.103.000
580	150		98.216.000	98.216.000	97.835.000	97.457.000	97.133.000
Base cover, H 150 mm			97.986.000	97.986.000	62.806.000	57.239.000	98.259.000








^{*} Floor anchoring may be required, depending on the version.

Cabinet systems | Wall-mounted cabinets with hinged or sliding doors

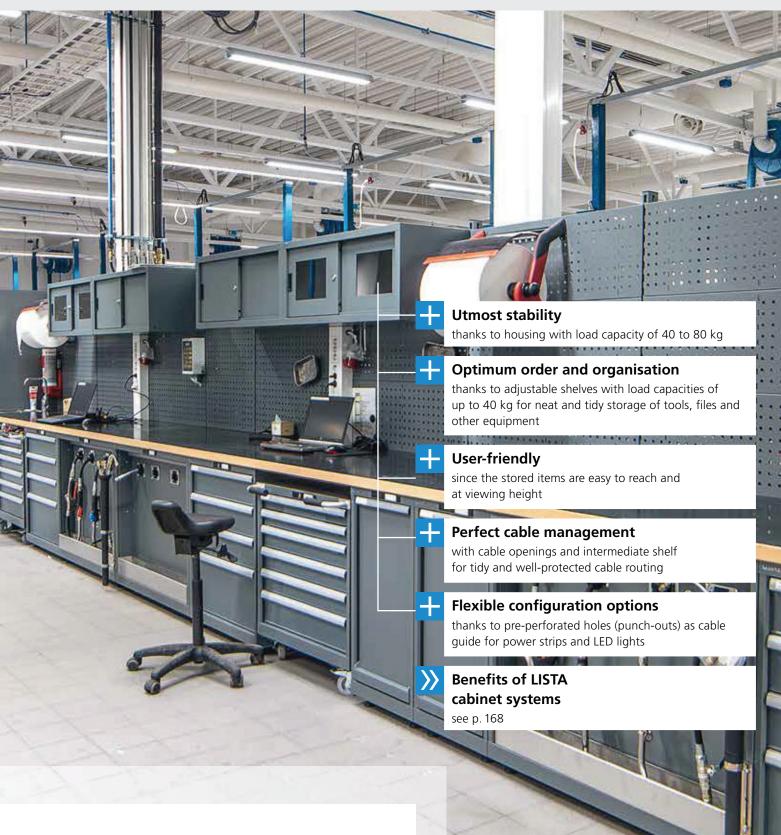

LISTA wall-mounted cabinets are perfect as additional storage space for small parts, documents and more. They keep your storage items ergonomically and conveniently stored at viewing height. Just mount them on the wall and in no time everything is just where it should be: neatly put away.







Art. no. **69.861.200** Wall-mounted cabinets with sliding doors, height 420 mm, RAL 7016



Wall-mounted cabinets

Flush-fitting hinged doors with reinforced edges for increased rigidity, with fulcrum pins, 110 ° opening angle. Sliding doors edged from one piece, low-noise ball-bearing-mounted sliding door guide. Housing incl. punch-outs for power supply to the cabinets. Adjustable shelving (adjustable grid 25 mm) cable compartments under each shelf are optionally available. Base height: 35 mm.

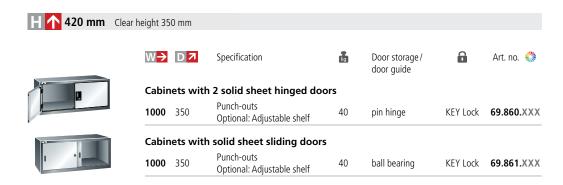

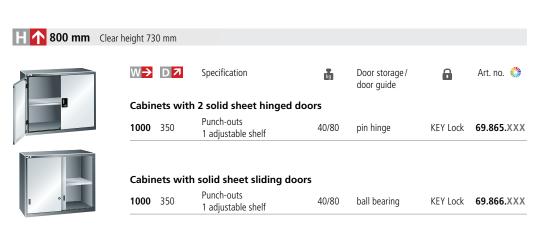



Adjustable shelf for wall-mounted cabinet

Width: 1000 mm. Load capacity: 40 kg.

Art. no. **69.883.XXX**



Cover flap set

Custom-fit flap and cable collar for punch-outs.
Delivery: 2 hinged flaps.
1 cable collar

Art. no. **69.869.000**





Clasp lock KEY Lock

- standard locking system for hinged doors with replaceable cylinders
- makes it easy to adapt to existing locking systems

Lock-down cylinder lock / KEY Lock

- locking system for sliding doors
- cannot be prised out thanks to the rightangled bar



Extremely smooth running

 the ball bearing rollers of the sliding doors run quietly on the guide rails



Cable feed-through

- punch-outs allow the cabinet to be provided with a power supply, see p. 147
- punch-outs are present on the lid and base
- there is space for cable routing underneath the shelf

Cabinet systems | Wall-mounted shutter cabinets





Wall-mounted cabinet with aluminium roller shutters

This type of cabinet is ideal for securely hanging tools. The space-saving roller shutter winder gives a maximum usable depth of 215 mm and also allows the use of standard folders. In addition, this cabinet can optionally be equipped with an integrated cable conduit to accommodate the energy modules (see p. 145). For direct fastening to the worktop, this cabinet (1050 mm high) can also be ordered without a floor (see p. 121).



Art. no. 69.851.200 Wall-mounted cabinet with aluminium roller shutters, RAL 7016

Roller shutter cabinet


Aluminium roller shutter with spring-loaded winding ensures a large usable depth (215 mm) and safe operation (self-locking). The sturdy steel housing and the aluminium roller shutters ensure stable, secure storage. Punch-outs intended for power supply. Perforated rear panel for using perforated wall hooks (see p. 163), with square perforation 10×10 and 38 mm divisions.



Model	Fastening	W>	D 7	H	Art. no. 🞇
with floor	on support pillar via perforated rear panel	1500	250	800	69.850.XXX
with floor	on support pillar via perforated rear panel	2000	250	800	69.851.XXX
		W→	ח א	å	Art no 🦓



-		<u>"9</u>	7 tr c. 110.
1500	175	20	69.854.XXX
2000	175	20	69.855.XXX
	1500	1500 175	1500 175 20



Power conduit set Integrated cable conduit solution.	for W	for power modules	Art. no.
Designed for installation in roller shutter cabinet. The power conduit	1500	6×	89.022.XXX
can be equipped with the power modules. see page 145	2000	8×	89.023.XXX




Housing

- Sturdy steel structure
- Version with shelf as an overhead cabinet or alternatively without a shelf as an top-mounted cabinet, see p. 121



Handle

- Integrated handle
- Locking mechanism has no impact on usable depth
- Locking with KEY lock, keyed alike option also possible on request



Power conduit

- Optionally integrated power conduit
- Configurable with power modules (see page 144)



Adjustable shelf

- · Optional adjustable shelf
- Adjustment increment: 25 mm

Cabinet systems I Roller shutter cabinets






Roller shutter cabinets

Depending on the model, the cabinets on this page are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 or 100 kg, pullout shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg, roller shutter in PVC, colour similar to light grey, RAL 7035











Direct access to all stored items

The smooth-running roller shutter which can be operated with one hand stops at any height without the need for catches.



Strike plate

The sturdy metal strike plate comes with an anti-trap finger guard for safety reasons.



Push handle cylinder lock/ **KEY Lock**

The replaceable cylinder makes it is possible to adapt the locking system as required.



19	950 mm	W	1000 mm	D 71	580 mm*
Adjustable shelves	Drawers	Pull-out shelves	kg	•	Art. no. 🞇
4	-	-	60	KEY Lock	58.401.XXX
2	-	2	50/60	KEY Lock	58.402.XXX
2	1×95	2	50/60	KEY Lock	58.404.XXX
2	-	4	50/60	KEY Lock	58.403.XXX
2	2×95	3	50/60	KEY Lock	58.406.XXX
2	1×95	4	50/60	KEY Lock	58.405.XXX

Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by $4 \times 90^{\circ}$. 30 mm thick with load-bearing capacity of 60 or 100 kg.

Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.

Drawers and pull-out shelves


Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016.

Robust steel tubing construction 40 × 40 mm, closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

□ 7 For cabinet depth mm	Load capacity kg	Art. no.
Adjustable shelf		
580	60	58.108.000
580	100	60.409.000
	Usable dimensions (W × D mm)	980×506

		Usable dimensions (W × D mm)	980 × 506
Divider for adjustable s	shelf		
580		L 490×H 150 mm	58.146.000
Drawer	Η <mark>↑</mark>	Usable height mm	
580	95	72	58.113.000
580	145	122	57.471.000
		Usable dimensions (W×D mm)	867 × 459
Pull-out shelf	Η <mark>↑</mark>	Usable height mm	58.115.000
580	53	43	
		Usable dimensions (W×D mm)	867×459
Base	H 1		
580	150		98.216.000
Base cover, H 150 mm			97.986.000





Partition material see p. 176



Cabinet systems I Vertical pull-out cabinets



Vertical pull-out cabinets from LISTA provide space-saving storage for tools, supplies and more where space is at a premium. The pull-outs can be used from both sides and can optionally be fitted with perforated panels or shelves to hold plastic containers, tools, documents and LISTA tool holders for NC storage. The result: maximum storage space with a very small footprint. That's what we call efficient.





Art. no. **85.799.010** Fronts light blue, RAL 5012 (excluding storage containers)

Vertical pull-out cabinets

Depending on the model, all cabinets on this page are equipped with: front covers 3 × W 307 mm, 4×W 230 mm, pull-outs with a load capacity of 200 kg, perforated panels with square holes 10 × 10 mm, 38 mm apart






Adjustable shelves

The adjustable shelves in two available widths provide optimum storage space for stored items.



NC storage

Safe and space-saving storage of tools in the vertical pull-outs in exchangeable frames.



Perforated panels

Pull-out perforated panels enable flexible attachment of stored items thanks to a wide range of hooks.

For NC tool holders and partitioning schemes see p. 101

For pegboard hooks, plastic storage containers see p. 162

200 per pull-out







NC tool holder = 554 mm	4	200	KEY Lock	82.980.XXX
LISTA NC tool holder (see p. 102), usable dimensions: W 118 × D 554 mm, accommodation length for				
3 or 4 pull-outs with 4 adjustable shelves each for	3	200	KEY Lock	82.979.XXX
Cabinet with front covers for NC storage				
Specification	Pull-outs	kg		Art. no. 🞇



Cabinet with front covers and adjustable shelves 3 or 4 pull-outs with 4 adjustable shelves each, plain, 200 KEY Lock 85.792.XXX usable dimensions: W 291/210 \times D 584 \times H 25 mm 4 200 KEY Lock 85.799.XXX



Cabinet with front covers and perforated panels 3 or 4 pull-outs with perforated panels, 3 200 **KEY Lock** 85.798.XXX H 1700 × D 612 mm, can be used on both sides 4 200 KEY Lock 85.791.XXX



D 7 600 mm W → 1000 mm

Specification	Pull-outs	kg	6	Art. no. 🞇
Cabinet with 2 hinged doors and perforate	ed panels			
3 or 4 pull-outs with perforated panels,	3	200	KEY Lock	85.789.XXX
H 1700 × D 560 mm, can be used on both sides, door fitted with hinges, opening angle 115°		200	WEW I	05 700 777
		200	KEV Lock	25 722 YYY



www.lista.com

Cabinet systems | Heavy-duty cabinets

LISTA heavy-duty cabinets are perfect for storing heavy materials on adjustable shelves, pull-out shelves and in drawers. Additionally, all common access protection solutions, from retracting doors and hinged doors to vertical roller shutters, can be used. For greater transparency of stored items, doors can be supplied with viewing windows on request.

Utmost stability

with a housing load capacity of up to 1500 kg

High load capacities

160 kg per adjustable shelf, 200 kg per drawer/pull-out shelf

Outstanding safety features – with single drawer blocking mechanism for heavy-duty cabinets with retracting doors to prevent the cabinet from tipping over

User-friendly

because of the fast access to all stored items – retracting doors or smooth-running roller shutters with user-friendly push handle

Secure locking

with retracting doors, hinged doors or roller shutter and intelligent locking systems like CODE/RFID Lock

Well protected

protection from dirt, liquids and physical loads thanks to closed housing with impact-resistant and abrasion-resistant surface

Perfectly organised

with viewing windows made from UV-resistant, shatterproof acrylic

Can be adapted to new storage items at any time

with the flexible integration and rearrangement of drawers, pull-out shelves and adjustable shelves in increments of 25 mm

Fully compatible with LISTA drawer cabinets and drawer storage walls because of the standardised unit of measure

see p. 38 and/or 84









Art. no. 59.542.010 Light blue, RAL 5012

Art. no. 59.543.070 Ruby red, RAL 3003 (excluding partition material)

Heavy-duty cabinets with retracting doors

The cabinets are equipped with: adjustable shelves, galvanised, 33 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. Retracting doors folded from one piece, optionally either in solid sheet steel or with viewing windows. Fitted in hinge brackets, retracting range 90°, projection of doors when opened is 85 mm. Anti-tilting is ensured by the single-drawer blocking system. Available with KEY Lock, CODE Lock or RFID Lock locking systems.

54 × 27 E 1950 mm 1146 mm Pull-out Adjustable Art. no. Drawers Hinge pins shelves shelves mounted Cabinets with 2 solid sheet retracting doors



-	4	-	160	Hinge bracket	KEY Lock	59.541.XXX
2×75 / 1×150	2	2	160/200	Hinge bracket	KEY Lock	59.543.XXX



Retracting doors

- disappear in the housing when opened in order to give the best possible access (doors only project by 85 mm)
- folded from a single piece
- either made of full sheet steel or equipped with viewing windows
- fitted into hinge brackets, retracting range 90°
- KEY Lock, CODE Lock or RFID Lock locking systems



- fully extendable
- load capacity up to 200 kg



Cabinets with 2 viewing window retracting doors

=	4	=	160	Hinge bracket	KEY Lock	59.540.XXX
2×75/	2	2	160/200	Hinge bracket	KEY Lock	59.542.XXX



When ordering a cabinet from these two pages with CODE or RFID Lock locking system, please add the suffix "C" or "F" to the article number given in the table (e.g. 98.081.XXX.C).







Robust housing

welded sheet steel construction with integrated support pillar system



For partition material see p. 248





Cabinet systems I preconfigured heavy-duty cabinets



Art. no. **98.091.100** Signal blue, RAL 5005

Art. no. 98.086.050 Metallic grey, NCS S 6502-B

Heavy-duty cabinets with hinged doors

The cabinets are equipped with: adjustable shelves, galvanised, 35 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. Hinged doors folded from one piece, optionally either in solid sheet steel



$2 \times 100 /$ KEY Lock 98.093.XXX 160/200 Pin hinge 2×150 Cabinets with 2 viewing window hinged doors

-	4	-	160	Pin hinge	KEY Lock	98.082.XXX
1 × 100 / 1 × 150	3	-	160/200	Pin hinge	KEY Lock	98.086.XXX
2×100 / 2×150	2	1	160/200	Pin hinge	KEY Lock	98.094.XXX

Hinged doors

- folded from a single piece
- either made of solid sheet steel or equipped with viewing windows
- with pin hinge, opening angle approx. 115°
- Lock with KEY, CODE or RFID Lock










Heavy-duty cabinets with roller shutter

The cabinets are equipped with: adjustable shelves, galvanised, 35 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. The smooth-running PVC roller shutter stops at any height without locking. Colour: aluminium colours, the colour of the strike plate with KEY Lock locking system is variable.

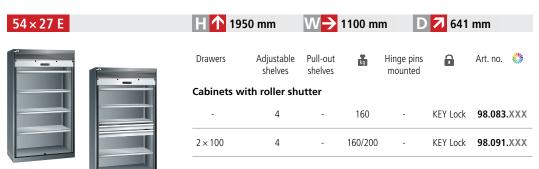



Roller shutter

- especially suitable when space is limited
- stops at any height without the need for catches
- aluminium colours, colour of strike plate variable
- KEY Lock locking system

For partition material sets and labelling system see p. 248.





Art. no 59.54 59.53 Pale bl	4.010	
i	Tilt protection is ensured by the only applies to retracting doors.	l-out lock;

Drawers

Drawers with different front heights can be incorporated into the same housing in any order. The insides of the drawer walls are all fitted with a slotted grid in units (E) of 17 mm so that each drawer can be partitioned as required. Colour: grey, NCS 4502-B.

Pull-out shelves

For storing heavy individual items and equipment. Perfectly fitting, variable height assembly of 25×25 mm in the cabinet housing. The inserted slats enable stored items to be stored and removed flush with the handle. Specification: steel sheet. Colour: grey, NCS 4502-B. Slats are made of shaped sheet steel profile, sendzimir galvanised.

Adjustable shelves, slotted or plain

Adjustable shelves including 4 shelf supports. Adjustable shelf, slotted, fitting against the rear. Specification: steel sheet, galvanised. Long sides folded $4 \times 90^\circ$. Slotted partition; 50 mm. Load capacity: 160 kg.

Dividers for adjustable shelves

Slotted for separating 2 adjustable shelves attached one above the other. The height of the dividers depends on the distance between the adjustable shelves. Specification: steel sheet. Colour: light grey, RAL 7035.

54 × 27 E	$W \rightarrow \times D \nearrow$	1100 × 641	1146 × 690
H		1950	1950
	Clear height (mm)	1790 / 1640	1830
	for design	Hinged doors roller shutter	Retracting doors
		Art. no. 🛚 🐫	Art. no. 🞇
Housing		98.096.XXX	59.544.XXX
Hinged doors excl. clasp lock			
Solid sheet		62.031.XXX	-
Viewing window		62.032.XXX	-
Retracting doors excl. clasp lock			
Solid sheet		-	59.532.XXX
Viewing window		-	59.535.XXX
+ clasp lock			
Key Lock, separately lockable		49.060.000	49.060.000
CODE Lock		49.085.000	49.085.000
RFID Lock		49.086.000	49.086.000
Roller shutter excl. cylinder lock		98.097.XXX	-
+ push handle cylinder lock		62.062.000	-

H	Usable height mm	Cladding height mm		
Drawers				
75	57.5	49	85.700.080	85.700.080
100	82.5	76	85.701.080	85.701.080
150	132.5	126	85.702.080	85.702.080
200	182.5	176	85.703.080	85.703.080
Usable dime	nsion W × D mm		918×459	918×459
Load capacit	ty kg		200	200

Pull-out shelf	85.704.080	85.704.080	
Usable dimension W × D mm	918×459	918×459	
Height mm	75	75	
Load capacity kg	200	200	

Adjustable shelf	98.098.000	59.545.000	
Usable dimension W × D mm	967×549	966 × 500	
Height mm	35	33	
Load capacity kg	160	160	
Model	Plain	Slotted	

	Usable height mm	Distance between shelves TE—TE* mm		
Dividers	179	225	_	59.415.000
	329	375	-	59.416.000

^{*} Distance between shelves from top edge to top edge

Base

Robust steel tubing construction 40×40 mm, , closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

Base cover	98.246.000	62.888.000
Base, H 150 mm	97.588.000	59.412.000

Cabinet systems I Clothing lockers







Cabinet systems | Clothing lockers



Art. no. **94.424.080** Pigeon grey, NCS S 4502-B

Clothing lockers

1-leaf for 1 lockable compartment

Equipment per compartment

Cabinet width mm

single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (1 compartment lockable)

1 hat rack

1 clothes rail, with 3 sliding coat hooks

1 towel holder

W 2 500 mm

without substructure

DΛ

1700 mm

1800 mm with base, 100 mm

1850 mm with feet, 150 mm

Compartments width: 300 or 400 mm Clear height: 1280 mm / 300 mm

KEY Lock

KEY Lock

KEY Lock

KEY Lock

KEY Lock

KEY Lock

(hat rack)

compartment width

Number of

plain

plain

plain

perforated

perforated

perforated

compartments Door specification





600

Art. no. 🞇

94.414.XXX

94.531.XXX

94.426.XXX

94.552.XXX

94.447.XXX

94.573.XXX



300 mm

900

Art. no. 🞇

94.405.XXX

94.534.XXX

94.429.XXX

94.555.XXX

94.450.XXX

94.576.XXX

94.558.XXX

94.453.XXX

94.579.XXX



ricet	VVICII	base			
	400 mm				
1200	800	1200			
4	2	3			
Art. no. 🞇	Art. no. 🛚 👯	Art. no. 🞇			
94.417.XXX	94.420.XXX	94.411.XXX			
94.537.XXX	94.543.XXX	94.546.XXX			
94.432.XXX	94.438.XXX	94.441.XXX			

94.564.XXX

94.459.XXX

94.585.XXX

94.567.XXX

94.462.XXX

94.588.XXX

Hilli

titi

Hill 11111

lilli

Hill

11111

11111

m titti

mn

um m

·III

E.m 1111

1111

1111

1111

1111

1111

1111

1111

1111

111

ППП

11111111

Пінін

հրկիկ

hhhh

прин

пини

HIHHH

пини

HIIIII

mun

DISTRICT.

HIHIT

mum

пини

mun

man

min

min

min

minn mun

EXTRECT

ERFEITE.


1111111

11111111

11111111

1111111







198



Clothing lockers

1-leaf for 2 lockable compartments


Equipment per compartment

single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (2 compartments lockable)

- 1 hat rack
- 1 clothes rail, with 3 sliding coat hooks
- 1 towel holder

Compartments width: 300 mm Clear height: 1280 mm / 300 mm

(hat rack)







Sophisticated ventilation system

- the air vents located on the top and bottom of the housing ensure permanent circulation of air in the locker
- door models with individual perforation pattern on request



Air duct

Elimination of odours thanks to high air exchange rate and improved drying through on-site forced ventilation.

Air duct on request.

compartment width

	compartment width	300	IIIII
vidth mm		600	1200
	Number of compartments	2	4
	Door specification	Art. no. 🞇	Art. no. 🞇
KEY Lock	plain	94.302.XXX	94.305.XXX
KEY Lock	perforated	94.320.XXX	94.323.XXX
KEY Lock	plain	94.308.XXX	94.311.XXX
KEY Lock	perforated	94.326.XXX	94.329.XXX
KEY Lock	plain	94.314.XXX	94.317.XXX
KEY Lock	perforated	94.332.XXX	94.335.XXX
	KEY Lock KEY Lock KEY Lock KEY Lock KEY Lock	Number of compartments Door specification KEY Lock plain KEY Lock perforated KEY Lock plain KEY Lock plain KEY Lock perforated KEY Lock plain	Number of compartments Door specification KEY Lock plain KEY Lock perforated WEY Lock plain MEY Lock perforated MEY Lock plain MEY Lock perforated MEY Lock plain MEY Lock perforated MEY Lock plain MEY Lock plain



2-leaf for 2 lockable compartments

Equipment per compartment

- 2 solid leaf door, flush fitting, surface plain or with perforated field for additional ventilation (2 compartments lockable)
- 1 hat rack
- 1 clothes rail, with 3 sliding coat hooks
- 1 towel holder

Compartments width: 300 or 400 mm Clear height: 1280 mm / 300 mm

(hat rack)







200 mm





with base



Inclined top

Clothes lockers with an inclined top prevent undesired use of the cabinet top as shelf space. Inclined top on request.





On request, you may also order benches, shoe racks, name and number plates, towel holders and more.



Base makes cleaning simpler

The closed base border on the floor makes it easy to clean changing room areas.

		compartment width	300	mm	400 mm
Cabinet width mm			600	1200	800
₩ 7 500 mm		Number of compartments	2	4	2
D	a	Door specification	Art. no. 🛚 🞇	Art. no. 🧩	Art. no. 🞇
1700 mm	KEY Lock	plain	94.342.XXX	94.348.XXX	94.345.XXX
without substructure	KEY Lock	perforated	94.369.XXX	94.375.XXX	94.372.XXX
1800 mm	KEY Lock	plain	94.351.XXX	94.357.XXX	94.354.XXX
with base, 100 mm	KEY Lock	perforated	94.378.XXX	94.384.XXX	94.381.XXX
1850 mm	KEY Lock	plain	94.360.XXX	94.366.XXX	94.363.XXX
with feet, 150 mm	KEY Lock	perforated	94.387.XXX	94.393.XXX	94.390.XXX



Versatile locking systems

cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available. Other locks available on request.

When ordering a clothes locker from this double page with closing device for padlock, please specify the suffix "V", or, for rotary knob safety lock, use the suffix "D" in addition to the article number from the table (e.g. 94.429.XXX.V)



Cabinet systems | Dual-level clothing lockers



Art. No. **94.424.080** Pigeon grey, NCS S 4502-B

Dual-level clothing lockers

equipment for each compartment

single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (1 compartment lockable)

1 hat rack

1 clothes rail, with 3 sliding coat hooks

1 towel holder

W 7 500 mm

without substructure

D 1

1700 mm

1800 mm with base, 100 mm

1850 mm with feet, 150 mm

Compartments width: 300 or 400 mm Clear height: 1280 mm (for top and bottom compartment)

KEY Lock

KEY Lock

KEY Lock

KEY Lock

KEY Lock

KEY Lock

Cabinet width mm





compartment width

Number of

perforated

perforated

perforated

plain

plain

compartments Door specification







	300 mm	400 mm		
600	900	1200	800	1200
2×2	3×2	4×2	2×2	3×2
Art. no. 🞇	Art. no. 🎇	Art. no. 🎇	Art. no. 🞇	Art. no. 🎇
94.468.XXX	94.471.XXX	94.474.XXX	94.480.XXX	94.483.XXX
94.594.XXX	94.597.XXX	94.600.XXX	94.606.XXX	94.609.XXX
94.489.XXX	94.492.XXX	94.495.XXX	94.501.XXX	94.504.XXX
94.615.XXX	94.618.XXX	94.621.XXX	94.627.XXX	94.630.XXX
94.510.XXX	94.513.XXX	94.516.XXX	94.522.XXX	94.525.XXX
94.636.XXX	94.639.XXX	94.642.XXX	94.648.XXX	94.651.XXX







Cabinet width mm

600

800

900

1200



Single- or double-sided base, height 150 mm

Single-sided or double-sided base, height 400 mm

Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, RAL 7016. Note: double-sided (for 2 cabinets, back to back)

Base, H 150 mm

W 🗷 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
500	single-sided	94.252.000	94.253.000	94.254.000	94.255.000
1000	double-sided	94.264.000	94.265.000	94.266.000	94.267.000



Note: double-sided (for 2 cabinets, back to back) Base. H 400 mm	
Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, Note: double-sided (for 2 cabinets, back to back)	RAL 7016.





W 7 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
500	single-sided	97.110.000	97.473.000	97.143.000	97.111.000
1000	double-sided	97.108.000	98.444.000	97.870.000	97.109.000

Shoe rack

W 7 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
230	secure	97.156.000	97.472.000	97.144.000	97.157.000
230	folds upward	98.230.000	98.683.000	98.617.000	98.231.000



Single-sided or double-sided base, height 400 mm

Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, RAL 7016. Note: double-sided (for 2 cabinets, back to back). Bench depth: 300 mm.

Base, H 400 mm

W 7 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
500	single-sided	94.946.000	94.947.000	94.948.000	94.949.000
1000	double-sided	94.950.000	94.951.000	94.952.000	94.953.000



Fixed or fold-up shoe rack

Can be attached to the bases using attachment brackets without screws. Number required: 1 per clothes locker. Colour: Attachment brackets anthracite grey, RAL 7016; shoe racks galvanised anthracite grey, RAL 7016. Bench depth: 300 mm.

Shoe rack

M Model		Art. no.	Art. no.	Art. no.	Art. no.	
230	secure	94.954.000	94.955.000	94.956.000	94.957.000	
	Distance between stands mm	310	510	610	910	
	Shelf length mm	336	536	636	936	
230	folds upward	94.966.000	94.967.000	94.968.000	94.696.000	
	Distance between stands mm	310	510	610	910	
	Shelf length mm	285	485	585	885	



Bench base for in-line installation on request

Upon presentation of a layout plan, the bases are available at **little cost** for single- and/or double-sided construction in a row. In addition, less cleaning is required thanks the small number of leg supports.



Double-sided base, height 400 mm with shoe racks

201 www.lista.com

Cabinet systems | Compartment cabinets











Compartment doors

Different compartment doors, e.g. with viewing windows or mail slot, on request



Inclined top part

An inclined top part prevents the cover from being used inadvertently as shelf space and reduces required cleaning.

Ventilation slots and label frames

The high-quality solid sheet doors provide very high stability and are also equipped with a label frame. Air vents at the top and bottom provide ideal ventilation.





Versatile locking systems

cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available. Other locking devices such as CODE/RFID Lock on request.




with closing device for a padlock, please specify the suffix "V" or, for a rotary knob safety lock, the suffix "D" in addition to the article number from the table (e.g. 11.525.XXX.V).

		Compartment width		300 mm			400 mm		
			Clear compartment width		240 mm			340 mm	
D 7 500 mm		Cabinet width mm		610	905	1200	415	810	1205
H with base	Compartment Clear compart-		Number of compartments -	2	3	4	1	2	3
H 150 mm	ment height	partments \$\int\$	•	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🔲	Art. no. 🛚 🐫	Art. no. 🛚 🐫
1095 mm	300 mm 280 mm	3	KEY Lock	-	11.513.XXX	-	-	-	-
1395 mm	300 mm 280 mm	4	KEY Lock	11.507.XXX	11.515.XXX	-	-	-	-
1695 mm	300 mm 280 mm	5	KEY Lock	11.509.XXX	11.517.XXX	11.521.XXX	-	-	-
1795 mm	400 mm 380 mm	4	KEY Lock	11.501.XXX	11.503.XXX	11.505.XXX	11.525.XXX	11.527.XXX	11.529.XXX
1995 mm	300 mm 280 mm	6	KEY Lock	11.511.XXX	11.519.XXX	11.523.XXX	-	-	-
inclined top part, H 50/200 mm		97.315.000	97.316.000	97.317.000	97.318.000	97.319.000	97.320.000		
for mounting superstructures at the factory			97.558.000	97.558.000	97.558.000	97.558.000	97.558.000	97.558.000	

COLOURS: With preconfigured cabinets housing in light grey, RAL 7035.



Cabinet systems I Battery charging cabinets with hinged doors

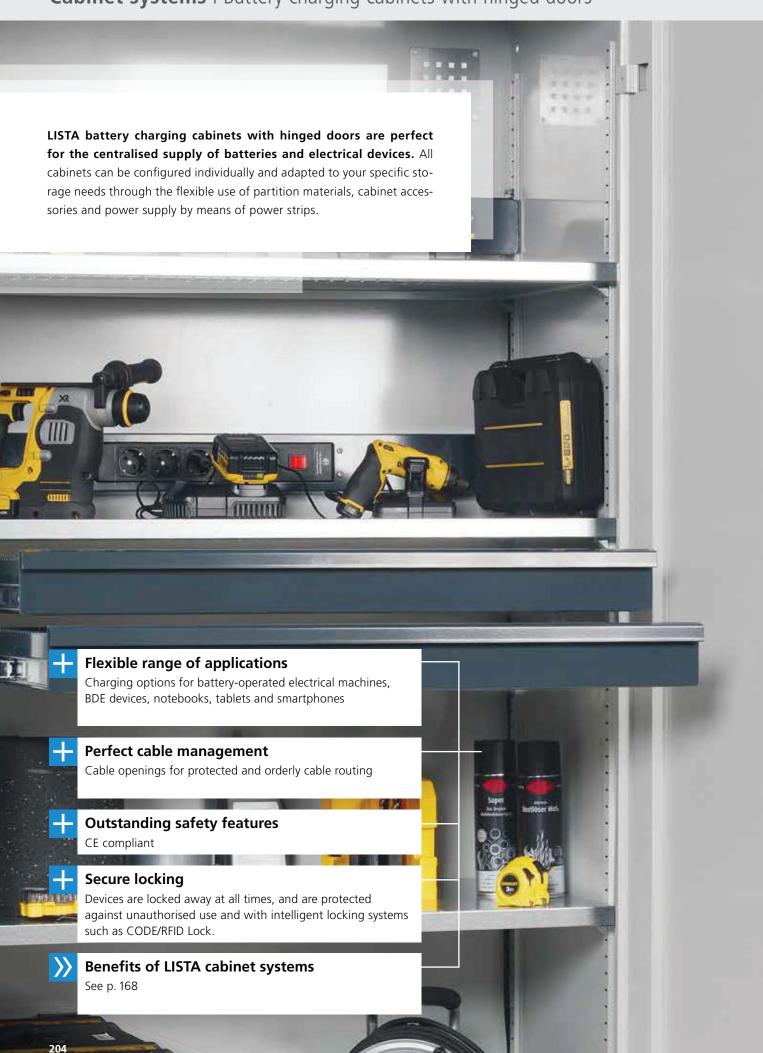



Battery charging cabinets with hinged doors

Depending on the model, the cabinets are equipped with **adjustable shelves**, galvanised, 30 mm thick, load capacity 60 kg. Painted **drawers**, anthracite gray (RAL 7016), load capacity 50 kg. **Power strips** with on/off switches and 4 or 5 sockets, 230 V.



Art. No. **62.955.020** Solid sheet hinged door, light grey (RAL 7035)



Art. No. **62.976.020** Viewing window hinged door, light grey (RAL 7035)



Art. No. **62.959.020** Solid sheet hinged door, light grey (RAL 7035)



Hinged doors with viewing windows

- For greater transparency of stored items
- Encourages order









W 🔁 1000 mm D 🔼	580 mm H 1950 mm					Solid sh	eet doors	Viewing windows
Number of power strips	Mounting position, power strips	Adjustable shelves	Drawers	kg	Door storage	6	Art. No. 🞇	Art. No. 🞇
Model D / Schuko								
1 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	62.954.XXX	62.972.XXX
2×5-socket (230V)	On side panel	4	_	60	Hinge	KEY Lock	62.955.XXX	62.973.XXX
1 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.956.XXX	62.974.XXX
2×5-socket (230V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.957.XXX	62.975.XXX
2 × 5-socket (230V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.959.XXX	62.977.XXX
2 × 5-socket (230V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.958.XXX	62.976.XXX
Model CH								
1 × 4-socket (230 V)*	On side panel	4	_	60	Hinge	KEY Lock	62.966.XXX	62.984.XXX
2×4-socket (230V)*	On side panel	4	_	60	Hinge	KEY Lock	62.967.XXX	62.985.XXX
I × 4-socket (230V)*	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.968.XXX	62.986.XXX
2×4-socket (230V)*	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.969.XXX	62.987.XXX
2×4-socket (230V)*	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.971.XXX	62.989.XXX
2 × 4-socket (230V)*, RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.970.XXX	62.988.XXX
Model F								
1 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	62.960.XXX	62.978.XXX
2 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	62.961.XXX	62.979.XXX
1 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.962.XXX	62.980.XXX
2 × 5-socket (230V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.963.XXX	62.981.XXX
2 × 5-socket (230 V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.965.XXX	62.983.XXX
2 × 5-socket (230V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.964.XXX	62.982.XXX
Model GB								
1 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	57.145.XXX	57.151.XXX
2 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	57.146.XXX	57.152.XXX
×5-socket (230V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.147.XXX	57.153.XXX
! × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.148.XXX	57.154.XXX
!×5-socket (230V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	57.150.XXX	57.156.XXX
2 × 5-socket (230V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.149.XXX	57.155.XXX

^{*} With 1× thermal fuse

^{**} RCD = residual current protective device (16 A/30 mA), MCB = miniature circuit breaker (CH = 10 A, D/F = 16 A)



Cabinet housing


incl. rubber grommets for protected cable feed through perforated rear panel in housing (punch-out) for optional fan installation.

D 7	H 1	Door storage	Art. No. 🞇	Art. No. 🞇	Art. No. 🞇
500 mm	1000 mm	Hinge	-	62.779.XXX	-
500 mm	1950 mm	Hinge	62.792.XXX	62.780.XXX	62.794.XXX
580 mm	1000 mm	Hinge	-	62.777.XXX	-
580 mm	1950 mm	Hinge	62.793.XXX	62.778.XXX	62.795.XXX

750

1000

1250



Punch outperforated rear housing panel for optional installation of a fan



Hinged bearing assembly

- For the installation of drawers and pull-out shelves, doors must be fitted with hinged bearing assembly
- Doors are flush with the cabinet housing
- Opening angle approx. 115°



Hinged doors

2 doors excl. clasp lock (must be ordered separately)

	H 1	Door storage	Art. No. 🞇	Art. No. 🞇	Art. No. 🞇
Solid sheet	1000 mm	Hinge	-	62.009.XXX	-
Solid sheet	1950 mm	Hinge	62.006.XXX	62.011.XXX	62.016.XXX
Viewing window	1000 mm	Hinge	-	62.137.XXX	-
Viewing window	1950 mm	Hinge	-	62.012.XXX	62.017.XXX



Adjustable shelf

Incl. 4 shelf supports. Specification: sheet steel, galvanised, slotted. Long sides folded by $4\times90^\circ$. 30 mm thick with load-bearing capacity of 60 or 100 kg.

D 7 For cabinet	depth kg	Art. No.	Art. No.	Art. No.
500 mm	60	58.104.000	58.107.000	58.110.000
500 mm	100	-	60.407.000	60.408.000
580 mm	60	58.105.000	58.108.000	58.111.000
580 mm	100	-	60.409.000	60.434.000
	Jsable dimensions (W×Dmm)	730 × 425/506	980 × 425/506	1230 × 425/506



Divider for adjustable shelf

For partitioning adjustable shelves. Specification: sheet steel, painted. Colour: light grey, RAL 7035.

D 7 For cabinet depth		Art. No.	Art. No.	Art. No.
500 mm	W 411 \times H 150 mm	58.145.000	58.145.000	58.145.000
580 mm	W 490 × H 150 mm	58.146.000	58.146.000	58.146.000



Drawers and pull-out shelves

Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: sheet steel. Colour: anthracite gray, RAL 7016. Only compatible with cabinets with hinge bearing assembly and a depth of 580 mm.



		Art. No.	Art. No.	Art. No.
Drawer, F	H 95 mm	62.308.000	58.113.000	57.481.000
580 mm	Usable dimensions (W \times D \times H mm)	617×459×72	867×459×72	$1117 \times 459 \times 72$
Drawer, F	H 145 mm	-	57.471.000	57.482.000
580 mm	Usable dimensions (W \times D \times H mm)		$867 \times 459 \times 122$	$1117 \times 459 \times 122$
Pull-out s	helf, FH 53 mm	-	58.115.000	=
580 mm	Usable dimensions (W \times D \times H mm)		867×459×43	



CODE Lock Art. No. **49.085.000**

KEY Lock Art. No. **49.060.000**



RFID Lock Art. No. **49.086.000**

Rase

Robust steel tubing construction 40×40 mm, closed side panels. Includes fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.



Base cover, H 150 mm	57.238.000	97.986.000	62.806.000
580 mm	98.657.000	98.216.000	97.835.000
500 mm	97.844.000	98.518.000	98.253.000
Base*, FH 150 mm			
	Art. No.	Art. No.	Art. No.



Power strips

With on/off switch and sockets, 230 V, without power and connection cables

D 7 For cabinet depth	Туре	Description	Art. No.
500 mm	D / PE	4-socket (230V)	82.474.000
500 mm	СН	3-socket (230V)*	82.475.000
500 mm	F	4-socket (230V)	82.476.000
500 mm	GB	4-socket (230V)	62.902.000
580 mm	D / PE	5-socket (230V)	62.763.000
580 mm	СН	4-socket (230V)*	62.782.000
580 mm	F	5-socket (230V)	62.739.000
580 mm	GB	5-socket (230V)	62.903.000

^{*} Incl. thermal fuse 10A



Side panel installation

Fastening kit for power strips

Side panel installation

Includes fastening material for screw connection of the power strips onto the cabinet side panel

□ 7 For cabinet depth	Art. No.
500 mm	62.771.000
580 mm	62.772.000

Rear panel installation

Power conduit for holding the power strips **(4-socket for CH and 5-socket for D, F and GB).** Fastening material included. Specification: sheet steel. Colour: anthracite gray, RAL 7016.

W→ For cabinet width	Art. No.
1000 mm	62.992.000
1250 mm	62.996.000



Rear panel installation

1



Cable fastening

Cable tie and mounting base kit for 2 m cable length

Quantity	Art. No.
5 pieces	390.024.000

Fan

Incl. adapter with integrated European plug For GB, an adapter is required, art. no. **61.160.000.**

туре	Art. No.
12V DC 106	57.467.000



RCD/MCB

RCD = residual current protective device (16 A) MCB = miniature circuit breaker (CH = 10 A, D/F = 16 A)

Quantity	Art. No.
1 piece	57.101.000





System socket supply cable

Simple and quick electrical installation through plug and socket connector system, 3-pin.

Туре	Length (m)	Art. No.
D / PE	3.0	89.545.000
СН	3.0	89.544.000
F	3.0	89.545.000
GB	3.0	89.546.000



Connecting cable

3-pin connector system with plug and socket

Length (m)	Art. No.
1.0	89.548.000
1.5	390.036.000
2.0	89.549.000
3.0	89.550.000

LED cabinet lighting

12 V LED lighting for cabinet height 1950 mm. Installed at the front right of the cabinet. Consisting of 1 LED light each, length: 800 mm (9 W) and 500 mm (5 W), integrated motion detector requires 1 free slot in one power strip.

Art. No. **57.463.000**

www.lista.com 207

Cabinet systems I Battery charging cabinets with compartments







Art. no. **98.409.020** Light grey, RAL 7035



Art. no. **98.416.070** Ruby red, RAL 3003



Versatile locking systems

 Cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available







1795 mm, with base 150 mm high



•••••	•••••	•••
•	•	1
•••••		***
•	0	
		11,
0	•	
		٠.,
۰	•	'

W >	D 7	No. of com- partments	Shelf dimension $(W \times H mm)$	Type	Module per compartment	Art. no. 🞇
Cabinets	with 8 co	ompartment	ts and KEY Lock			
810 mm	585 mm	2×4	400×400	D / PE	2×230V	98.409.XXX
810 mm	585 mm	2×4	400×400	D / PE	1×230V, 2×USB	98.415.XXX
810 mm	585 mm	2×4	400×400	D / PE	1×230V, 1×RJ45	98.419.XXX
810 mm	585 mm	2×4	400×400	CH	2×230V	98.411.XXX
810 mm	585 mm	2×4	400×400	CH	1×230V, 2×USB	98.629.XXX
810 mm	585 mm	2×4	400×400	CH	1×230V, 1×RJ45	98.631.XXX
810 mm	585 mm	2×4	400×400	F	2×230V	98.413.XXX
810 mm	585 mm	2×4	400×400	F	1×230V, 2×USB	98.417.XXX
810 mm	585 mm	2×4	400×400	F	1×230V, 1×RJ45	98.421.XXX
810 mm	585 mm	2×4	400×400	GB	2×230V	98.455.XXX
810 mm	585 mm	2×4	400×400	GB	1×230V, 2×USB	98.457.XXX
810 mm	585 mm	2×4	400×400	GB	1×230V, 1×RJ45	98.459.XXX

Cabinets with 12 compartments and KEY Lock							
1205 mm	585 mm	3×4	400×400	D / PE	2×230V	98.410.XXX	
1205 mm	585 mm	3×4	400×400	D / PE	1×230 V, 2×USB	98.416.XXX	
1205 mm	585 mm	3×4	400×400	D / PE	1×230V, 1×RJ45	98.420.XXX	
1205 mm	585 mm	3×4	400×400	CH	2×230V	98.412.XXX	
1205 mm	585 mm	3×4	400×400	CH	1×230 V, 2×USB	98.630.XXX	
1205 mm	585 mm	3×4	400×400	СН	1×230 V, 1×RJ45	98.632.XXX	
1205 mm	585 mm	3×4	400×400	F	2×230V	98.414.XXX	
1205 mm	585 mm	3×4	400×400	F	1×230 V, 2×USB	98.418.XXX	
1205 mm	585 mm	3×4	400×400	F	1×230 V, 1×RJ45	98.422.XXX	
1205 mm	585 mm	3×4	400×400	GB	2×230V	98.456.XXX	
1205 mm	585 mm	3×4	400×400	GB	1×230 V, 2×USB	98.458.XXX	
1205 mm	585 mm	3×4	400×400	GB	1×230V, 1×RJ45	98.460.XXX	




2×socket, 230V



Socket 230V/RJ45, without network cable, Plug+Play, Cat6



Socket 230V/Power USB











Art. no. **98.160.010** Pale blue, RAL 5012

Clothes lockers

The clothes lockers are equipped with the following for each compartment: Single-leaf solid sheet door, flush-fitting, smooth surface (1 compartment lockable), 1 hat shelf, 1 clothes rack with 3 sliding coat hooks, 1 towel holder, 2 × 230 V sockets.



Cabinet width mm				600	900
₩7 500 mm		Numl	ber of compartments Door specification	2 plain	3 plain
D↑	Model	Modules per compartment		Art. no. 🞇	Art. no. 🔲
1800 mm	D/Schuko	2×230V	KEY Lock	98.156.XXX	98.158.XXX
with base, 100 mm	CH	2×230V	KEY Lock	98.155.XXX	98.157.XXX
	F	2×230V	KEY Lock	98.161.XXX	98.159.XXX
	GB	2×230V	KEY Lock	98.162.XXX	98.160.XXX

E-scooter cabinets

The e-scooter cabinets are equipped with the following for each compartment: single-leaf solid sheet door, flush-fitting, perforated field for additional ventilation (1 compartment lockable), 1 hat shelf, 1 clothes rack with 3 sliding coat hooks, 1 velcro holder, 2 × 230 V sockets.




H → mm	W 7	D ↑ mm	Model	Number of compartments \times compartment width (mm)	Modules per compartment	•	Art. no. 🞇
1000	500	1700	D/Schuko	2×500	$2 \times 230 \text{V}$	KEY Lock	98.166.XXX
1000	500	1700	CH	2×500	2×230V	KEY Lock	98.167.XXX
1000	500	1700	F	2×500	2×230V	KEY Lock	98.168.XXX
1000	500	1700	GB	2×500	2×230V	KEY Lock	98.169.XXX



Power modules for clothes lockers and e-scooter cabinets



Connecting cable



Clothes rack



300 mm

compartment width

Hook and loop fastener for e-scooter cabinet



Cabinet systems | Battery charging cabinets for laptops









W → mm	D 7	H 1	No. of compartments	Shelf dimension (W×Hmm)	Туре	Module per compartment	Art. no. 🛚 👯
Laptop cabii	nets with 10 c	compartments	and cylinder lock				
415	500	1790	1 × 10	330 × 140	D / PE	1 × 230 V	98.600.XXX
415	500	1790	1 × 10	330 × 140	D / PE	2×230V	98.582.XXX
415	500	1790	1 × 10	330 × 140	CH	1×230V	98.597.XXX
415	500	1790	1 × 10	330 × 140	CH	2×230V	98.583.XXX
415	500	1790	1 × 10	330 × 140	F	1×230V	98.598.XXX
415	500	1790	1 × 10	330 × 140	F	2×230V	98.584.XXX
415	500	1790	1 × 10	330 × 140	GB	1×230V	98.599.XXX

 330×140

Art. no. **98.416.070** Ruby red, RAL 3003



1790

 1×10

Power modules for laptop cabinet

500

Socket strip can be ordered with one or two 230 V sockets per compartment.



 $2 \times 230 V$

98.585.XXX

USB adapter for sockets

GB

 $1 \times USB-C$ connection, $3 \times USB-A$ connection Overcharge, deep discharge, overload and short-circuit protection Colour: Black

Art. no. **61.257.000**



When ordering a laptop cabinet on this page with **CODE/RFID Lock**, please specify the suffix "F" in addition to the article number from the table (e.g. 98.600.XXX.F)



415

Cabinet systems | Battery charging cabinets as an e-bike charging station












Pale blue, RAL 5012



Art. no. 61.218.499 Pale grey, RAL 7035 Metallic grey, NCS S 6502-B



Socket outlet 230V/16A with cover, FI/LS switch per compartment

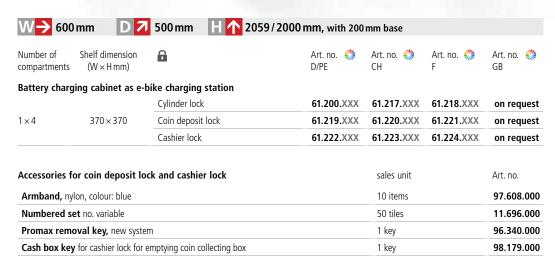




Cylinder lock with 3 keys and key security card



Coin deposit lock with door plate (without IP × 4 protection)







Cashier lock mechanical (without IP \times 4 protection)

215 www.lista.com

Cabinet systems | Environmental and oil cabinets











Observe legal regulations and directives

The canisters may only be filled with acid- and lye-free liquids (no abrasive media), oils and grease with a flame point above 55° Celsius. Maximum ambient temperature 40° Celsius. Please call us for special applications and further information.



Note:

Not suitable for storage of flammable materials

Oil cabinets

The cabinets are fitted with: chromium steel drip trays, 2 mm thick, welded to form a liquid-tight seal according to Section 19 of the Water Resources Act/German directive on steel trays (StawaR), 40-litre capacity, canister shelves (painted grey), NCS 4502-B, canister made of HDPE plastic with outlet valve (glossy chrome finish). Solid-sheet hinged doors folded from one piece, with fulcrum pins, 235-degree opening angle.



Equipment



Cabinets with 2 solid sheet doors

2 canister shelves 8 canisters, 25 l each 1 drip tray Tank dimensions: 651×620×100 mm (W×D×H)	200	Fulcrum pin	KEY Lock	71.460.XXX
3 canister shelves 10 canisters, 10 I each 4 canisters, 25 I each 1 drip tray Tank dimensions: 651×620×100 mm (W×D×H)	200	Fulcrum pin	KEY Lock	71.461.XXX

Door storage

kg



Canister shelf

Art. no. 🞇

The canister shelf has a handle on the left and right and a centre lip. It is only 27 E (451 mm) deep so there is enough room in the front area for the canister tap.



Fitted with screw cap. Filter in the filler neck. Outlet tap, glossy chrome finish with seal.



Width	Depth	Height	Volumetric capacity	Art.no.
120 mm	440 mm	270 mm	10 l	14.990.000
150 mm	440 mm	490 mm	25 l	14.991.000

Built-under drainage tray for oil cabinet

The built-under drainage tray of the oil cabinet has a leak-proof welded construction according to the Water Resources Act Sec. 19/StawaR (German directive on steel trays) and has a test certificate. It has a volumetric capacity of 40 l.

Art.no. **14.995.000**

Environmental cabinets

The cabinets are fitted with: galvanised drip trays, 3 mm thick, welded to form a liquid-tight seal according to Section 19 of the Water Resources Act/German directive on steel trays (StawaR), 20-litre capacity. Solid-sheet hinged doors folded from one piece, with hinges, 115-degree opening angle.

1950 mm



Cabinet with 2 solid sheet doors

 $982 \times 445 \times 70 \,\text{mm} \,(\text{W} \times \text{D} \times \text{H})$

Canister with outlet tap

Cubinet With 2 John Sheet Goors						
Equipment	kg	Door storage		Art.no. 🞇		
4 drip trays	100	Hinge	KEY Lock	60.474.XXX		
Tank dimensions:						



Drip trays

The drip trays feature a leak-proof welded construction according to StawaR (German directive on steel trays) and have a test certificate.



D 7 500 mm



please use the desired three-digit colour code (instead of XXX).

Vi kan skreddersy innredningen til ditt behov.

Vi står disponible til å bistå i deres prosjekter.

- *3D tegninger.
- *Oppmålinger.
- *Kartlegging av behov.
- *Montasje.

Ta gjerne kontakt med oss om du har et behov som ikke finnes i katalogen.





Lista ble grunnlagt i 1945

Hovedkontoret ligger i Sveits.



Produksjonen foregår i Sveits og Tyskland.



Kontaktinfo:

Ing Yngve Ege AS

Postadresse: Postboks 1 Sentrum 0101 Oslo

Besøksadresse: Ryenstubben 5 0679 Oslo Tel: 23 24 10 00 Fax: 23 24 10 01

ege@ege.no

Produktansvarlig.

Navn:

Telefon:

Epost: